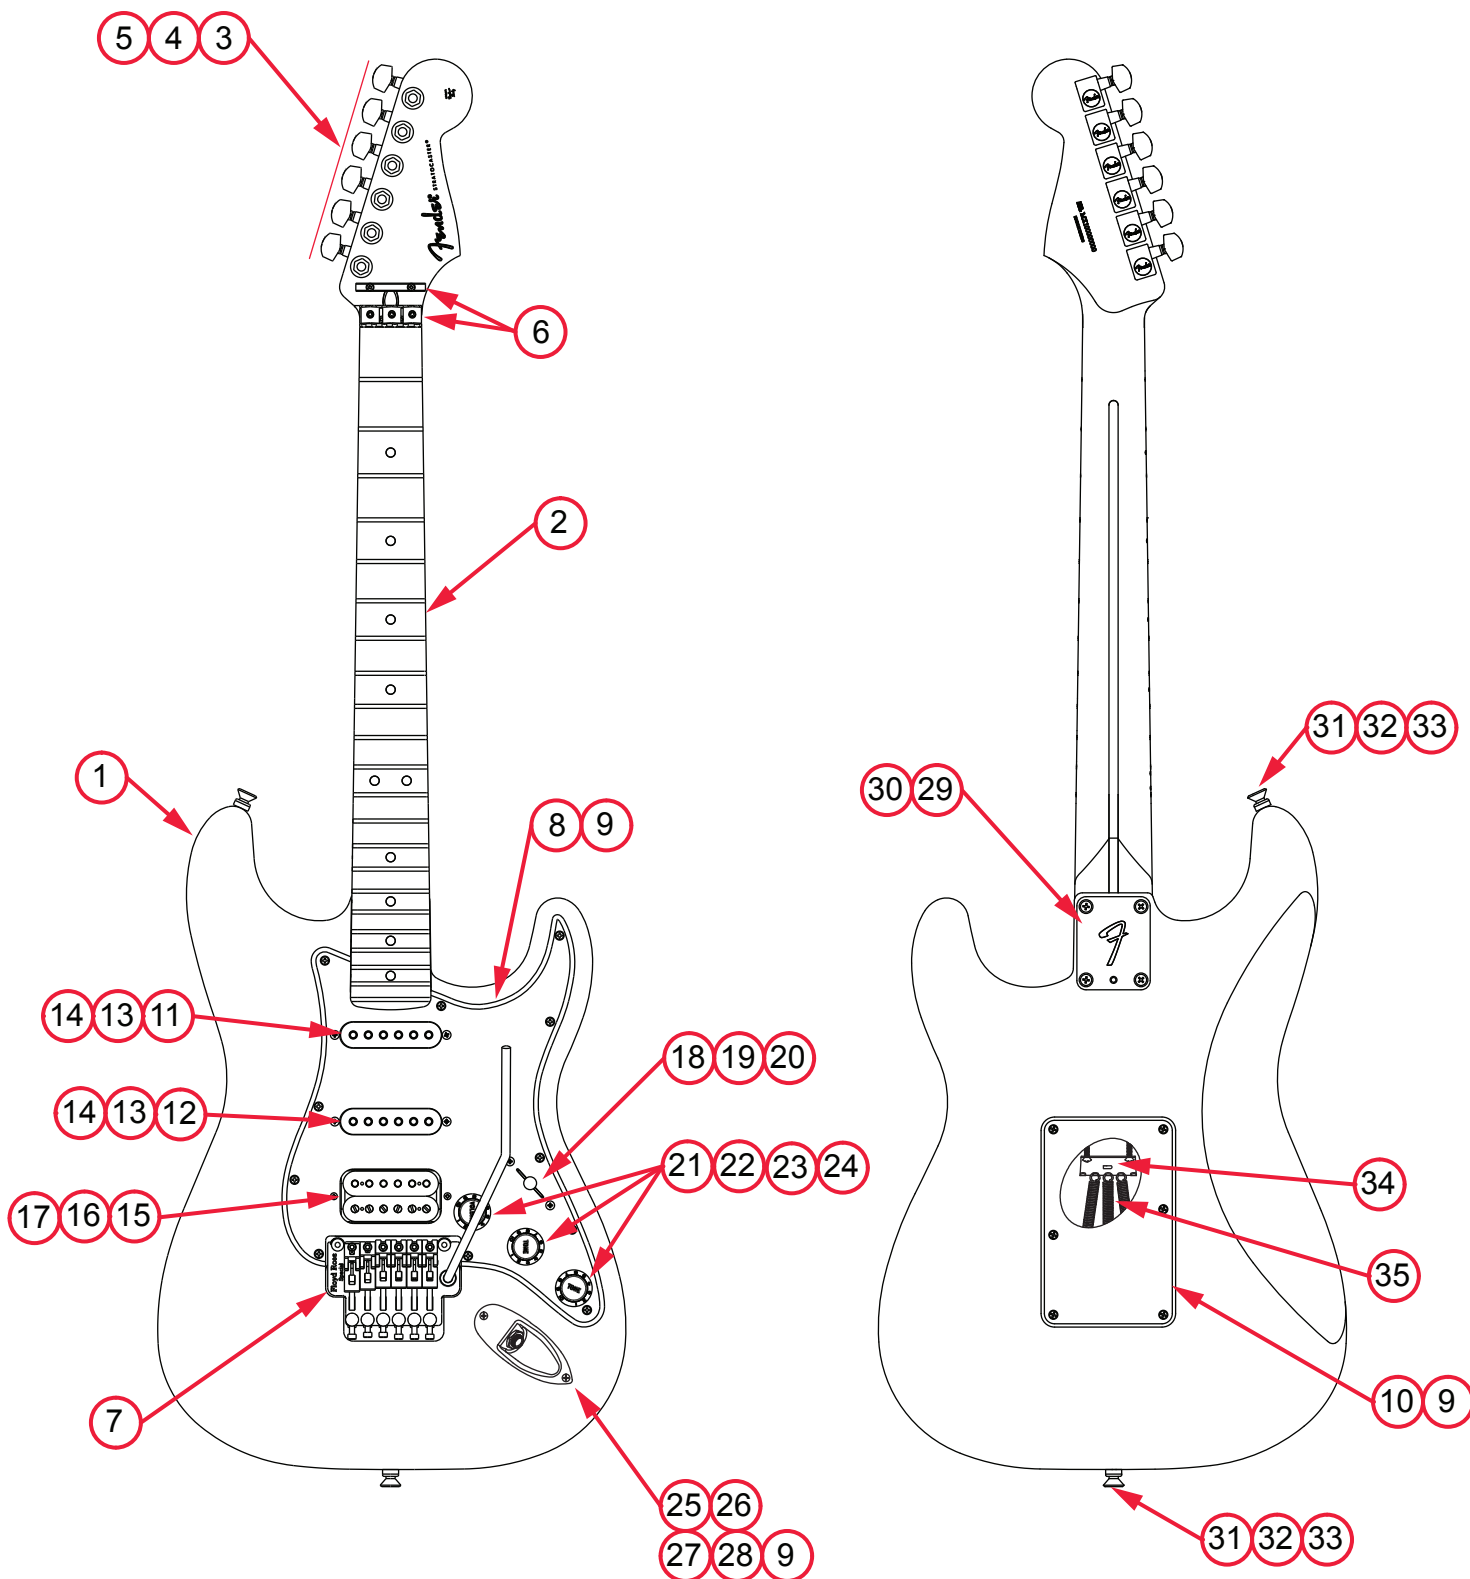


PLAYER STRATOCASTER® HSS FLOYD ROSE®

(114-9402-XXX/114-9403-XXX)

PARTS LAYOUT



PLAYER STRATOCASTER® HSS FLOYD ROSE®

(114-9402-XXX/114-9403-XXX)

PARTS LIST

REF#	DESCRIPTION	PART NUMBER
1	BODY PLAYER STRAT FR 3TSB	7712738500
	BODY PLAYER STRAT FR TDP	7712738513
	BODY PLAYER STRAT FR PWT	7712738515
	BODY PLAYER STRAT FR SRD	7712738525
2	NECK PLAYER STRAT FR PF	7712471000
	NECK PLAYER STRAT FR MN	7712472000
3	KEY GTR DUAL PIN MNT	0037429049
4	WASHER KEY	0053106049
5	BUSHING KEY	0058820049
6	NUT, FLOYD ROSE #2 CHRME 1.625"W #601211	9280650129
7	BRIDGE F ROSE STD FRT-S1000	0068144000
8	PICKGUARD STD STRAT HSS FR B/W/B	7706881000
9	SCRW SMAB 4x1/2 OHP NI	0015578049
10	COVER BACK PLATE FLOYD ROSE STRAT B/W/B	0054115000
11	PICKUP ASSY STD MEX NECK PARCH	7713131000
12	PICKUP ASSY STD MEX MID PARCH	7713132000
13	TUBING LATEX CUT .300 x 1/8ID x 1/4OD	0994916000
14	SCRW 6-32X3/4 RHP STL NI	0099346000
15	PICKUP ASSY "SHAWBUCKER 1E" PARCH	7712283000
16	SCREW M#3-48x13/16 RHP#4 HD	0050166049
17	SPRING HB MTG 3/4"	0050167049
18	5-WAY SUPER SWITCH	0992251000
19	SCREW-MA 6-32X5/8 RH NI	0994925000
20	KNOB PICKUP SWITCH PARCHMENT	0056253049
21	KNOB STRAT VOLUME/TONE PARCH	0056254049
22	CONTROL 250K 10% TPR SPLIT	0990830000
23	NUT HEX 3/8-32x3/32 TK NI	0016352049
24	WSHR LCK INTL 3/8x.500x.020	0022384049
25	JACK PHONE 1/4 - OUTPUT	0047329049
26	NUT HEX 3/8-32x3/32 TK NI	0016352049
27	WASHER LOCK INTL 3/8 X .687	0016436049
28	FERRULE JACK CHR STD STR	0033023000



PLAYER STRATOCASTER® HSS FLOYD ROSE®

(114-9402-XXX/114-9403-XXX)

PARTS LIST

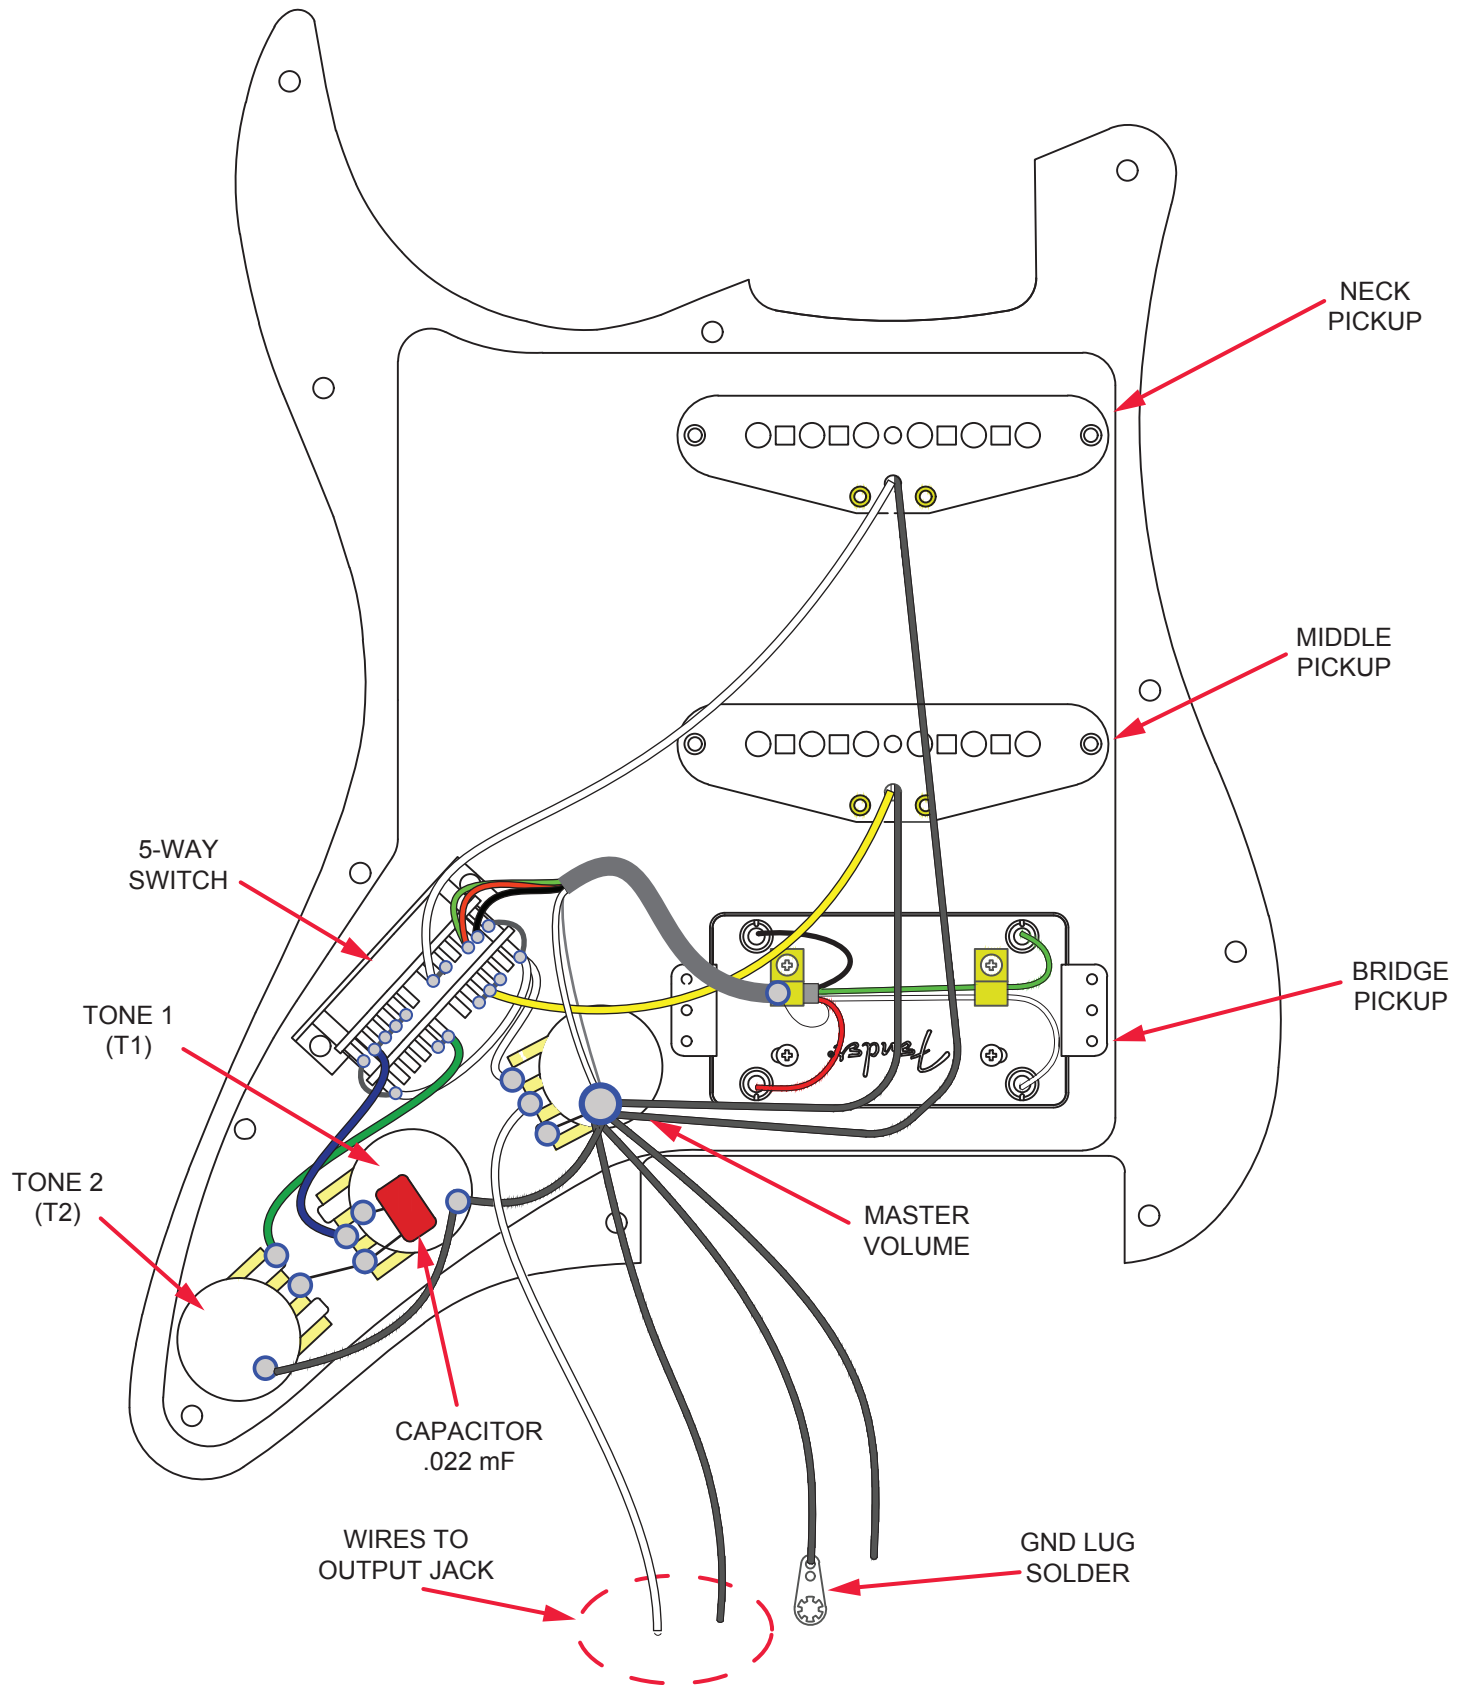
REF#	DESCRIPTION	PART NUMBER
29	NECK PLATE "F" TILT HOLE	7713198000
30	SCRW SMA 8x1-3/4 OHP NI	0015636049
31	BUTTON STRAP NI 0.156	0994915000
32	SCRW SMAB 5x1 OHP NI	0015610049
33	WHITE FELT WASHER	0994930000
34	SPRING, TREMOLO CLAW NICKEL	0050918000
35	SPRING TREMOLO TENSION, NI	0050922000



PLAYER STRATOCASTER® HSS FLOYD ROSE®

(114-9402-XXX/114-9403-XXX)

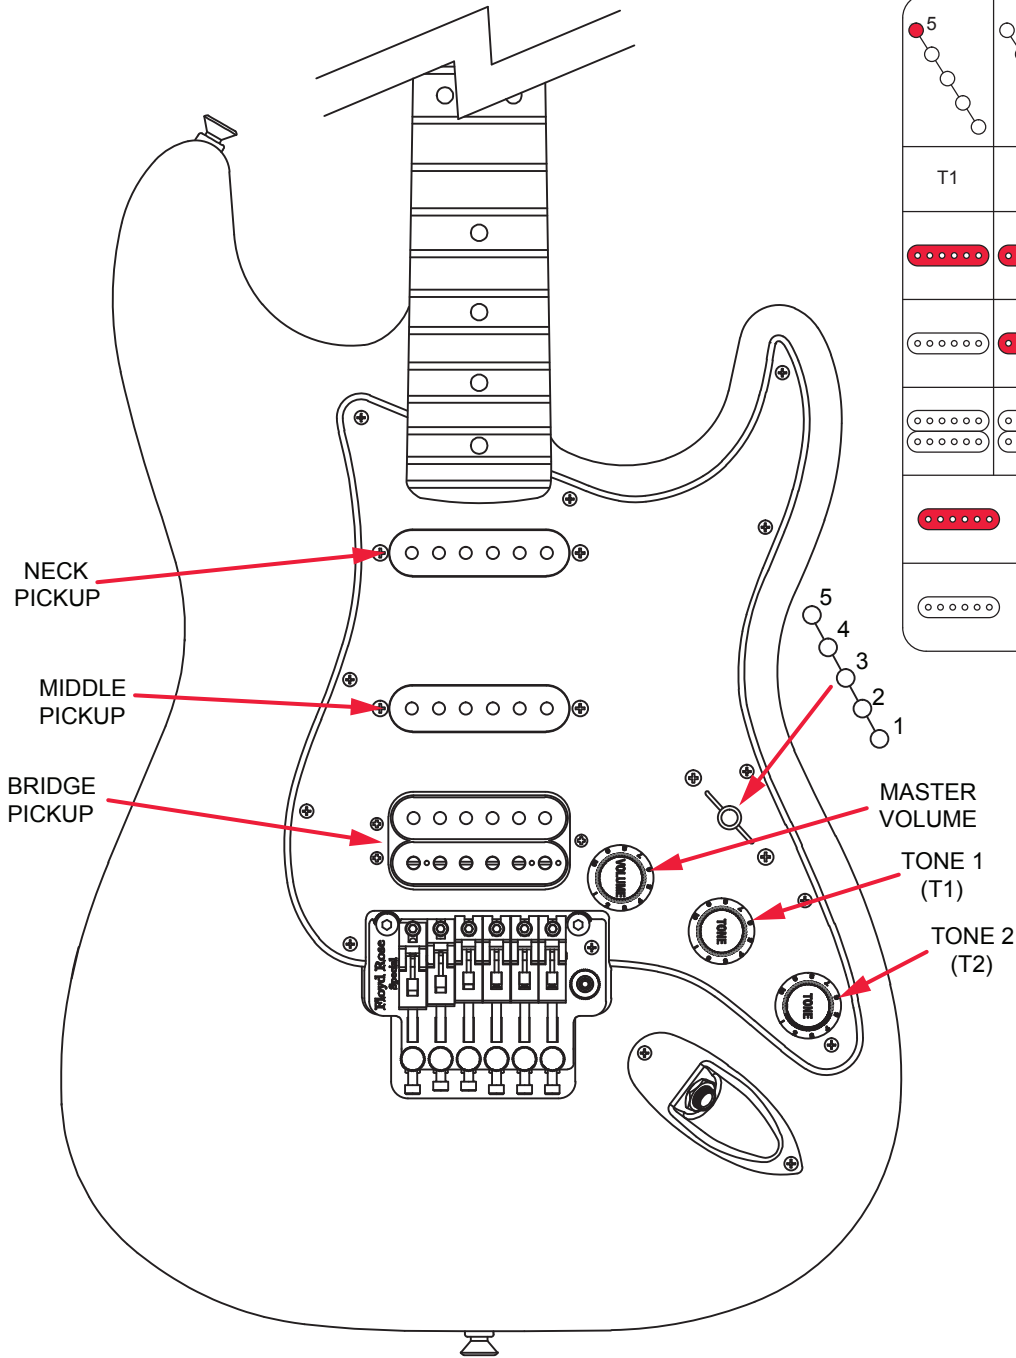
WIRING DIAGRAM



PLAYER STRATOCASTER® HSS FLOYD ROSE®

(114-9402-XXX/114-9403-XXX)

SWITCH AND CONTROL FUNCTION

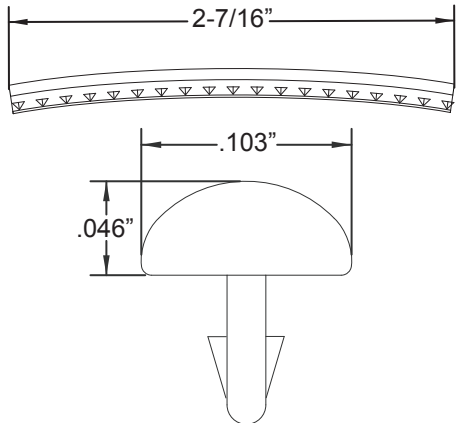
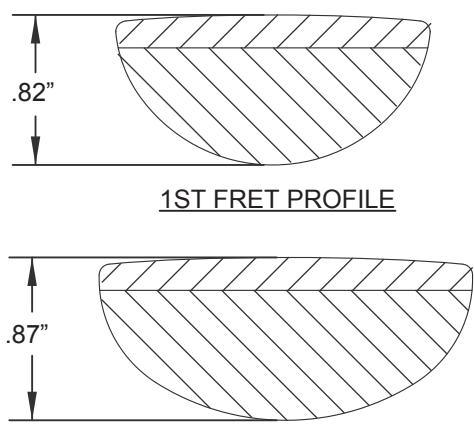



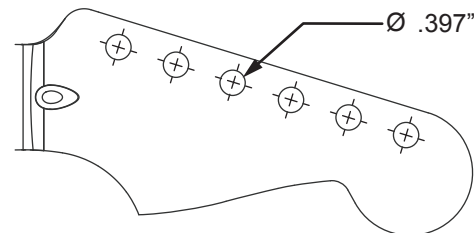
5-WAY SWITCH POSITION					SWITCH POSITION
T1	T1	T1	T1&T2	T2	TONE CONTROL
					NECK PICKUP
					MIDDLE PICKUP
					BRIDGE PICKUP
	PICKUP IS ON				 INDICATES POSITION OF 5-WAY SWITCH
	PICKUP IS OFF				

PLAYER STRATOCASTER® HSS FLOYD ROSE®

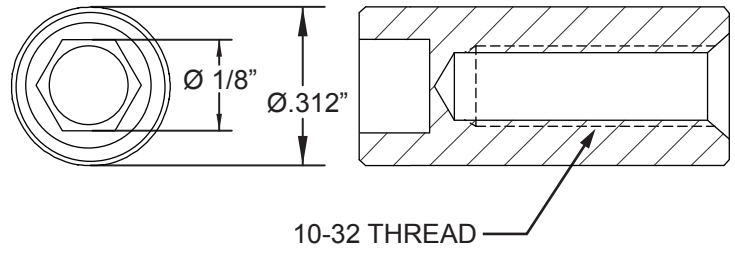
(114-9402-XXX/114-9403-XXX)

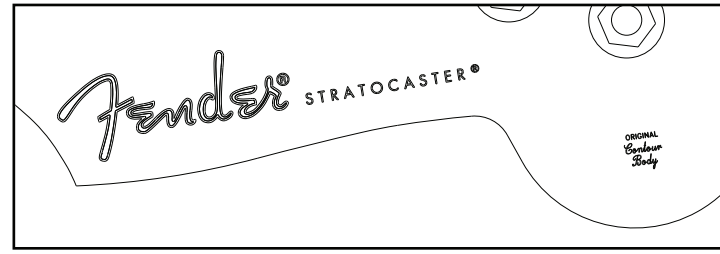
ADDITIONAL SPECIFICATION DETAIL

<p>FRET SIZE: MED JUMBO (FRET DIMENSIONS ARE BEFORE INSTALLATION)</p> 	<p>PLEASE NOTE: AS EACH NECK IS SANDED & FINISHED BY HAND, THICKNESS DIMENSIONS MAY VARY SLIGHTLY FROM THOSE SHOWN.</p>	<p>NECK PROFILE: MODERN "C"</p>  <p>1ST FRET PROFILE</p> <p>12TH FRET PROFILE</p>
--	---	---

<p>KEY GTR DUAL PIN MNT PING EA: P/N 0037429000 OUTER SHAFT DIAMETER .394"</p> 	<p>TUNING MACHINE THRU-HOLE INNER DIAMETER .397"</p> 
---	---

TRUSS ROD NUT P/N 0041694000



<p>LOGO: DECAL, STRATOCASTER MEX 2018. DECAL, ORIG CONTOUR BODY APPLIED UNDER THE FINISH</p> 	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4" style="text-align: center;">PICKUP SPECIFICATIONS</th> </tr> <tr> <th style="text-align: center;">POSITION</th> <th style="text-align: center;">MAGNETS</th> <th style="text-align: center;">DC RESISTANCE</th> <th style="text-align: center;">POLARITY</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">NECK</td> <td style="text-align: center;">ALNICO 5 BEVELED</td> <td style="text-align: center;">6.7 - 7.7KΩ</td> <td style="text-align: center;">NORTH</td> </tr> <tr> <td style="text-align: center;">MIDDLE</td> <td style="text-align: center;">ALNICO 5 BEVELED</td> <td style="text-align: center;">7.7 - 8.3KΩ</td> <td style="text-align: center;">SOUTH</td> </tr> <tr> <td style="text-align: center;">BRIDGE</td> <td style="text-align: center;">SCREW ALNICO 2 BEVELED</td> <td style="text-align: center;">7.3 - 7.9KΩ</td> <td style="text-align: center;">SOUTH NORTH</td> </tr> </tbody> </table>	PICKUP SPECIFICATIONS				POSITION	MAGNETS	DC RESISTANCE	POLARITY	NECK	ALNICO 5 BEVELED	6.7 - 7.7KΩ	NORTH	MIDDLE	ALNICO 5 BEVELED	7.7 - 8.3KΩ	SOUTH	BRIDGE	SCREW ALNICO 2 BEVELED	7.3 - 7.9KΩ	SOUTH NORTH
PICKUP SPECIFICATIONS																					
POSITION	MAGNETS	DC RESISTANCE	POLARITY																		
NECK	ALNICO 5 BEVELED	6.7 - 7.7KΩ	NORTH																		
MIDDLE	ALNICO 5 BEVELED	7.7 - 8.3KΩ	SOUTH																		
BRIDGE	SCREW ALNICO 2 BEVELED	7.3 - 7.9KΩ	SOUTH NORTH																		

